

YellowGate®

One Gate. Fits All. Stops Falls.




The Original Universal Safety Gate



Each component is
proudly crafted in our
South Carolina facility.

YellowGate®

YellowGate Fall Protection

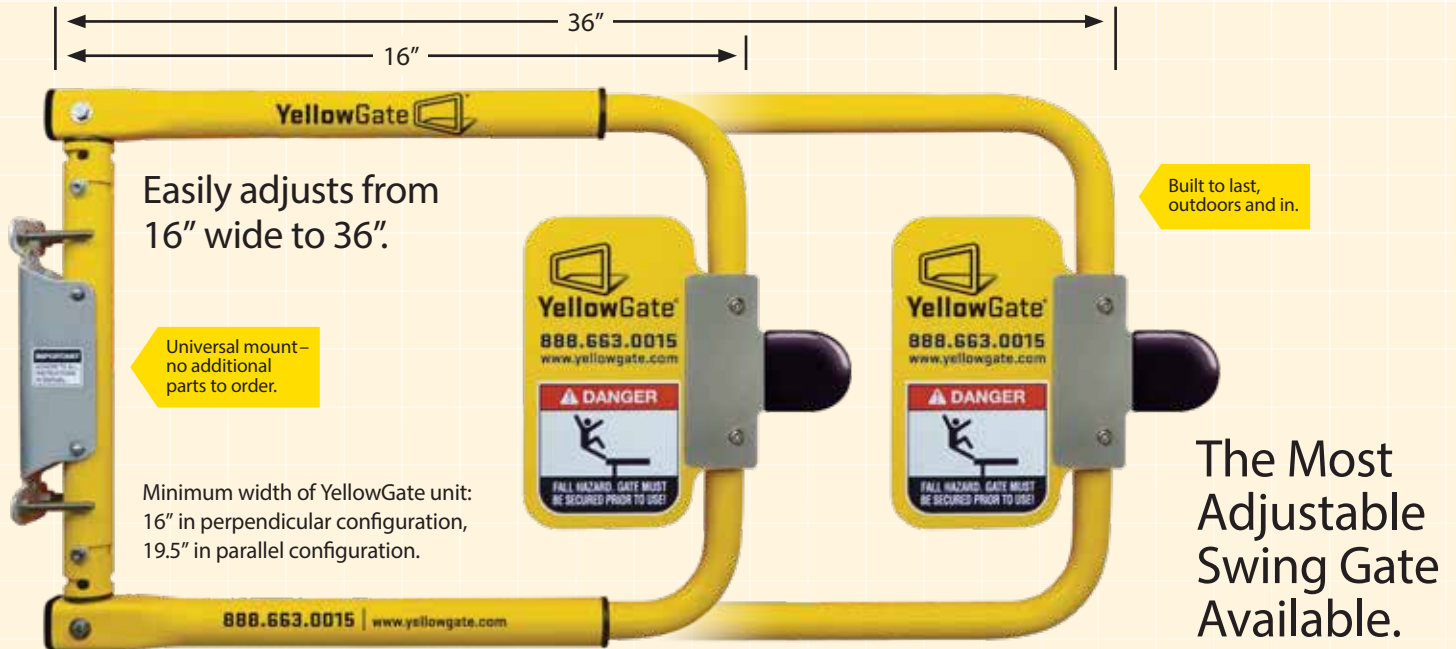

Easily adjusts from 16" wide to 36".

Universal mount—no additional parts to order.

Minimum width of YellowGate unit: 16" in perpendicular configuration, 19.5" in parallel configuration.

Built to last, outdoors and in.

The Most Adjustable Swing Gate Available.

Patent Pending
Malbec Tensioner
No spring to fail.




The Malbec Tensioner eliminates the need for a swing gate's most common failure point, the spring. The patent pending system provides field adjustable tension and maintenance free closure, every time.

YellowGate can swing either in or out by simply relocating two bolts.



Universal Mount

Mounts to walls, round and square tube and angle iron, with a single mount.

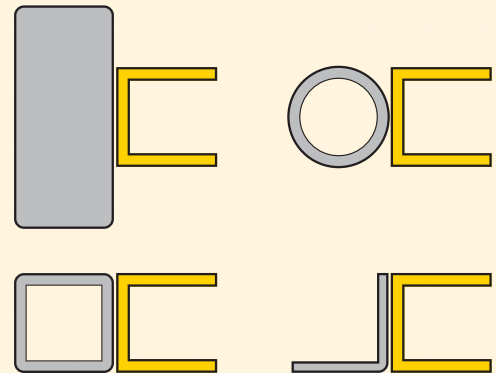

OSHA Regulation

1910.23 Guarding Floor & Wall Openings & Holes

(a) Protection of floor openings

(a.2) Guard ladderway floor openings or platforms like a stairway floor opening with passage through the railing either provided with a swinging gate or offset so a person cannot walk directly into the opening.