

SPARTAN SPX HPBY LED Zone 1 Bay Light



Power and Performance

High lumen output up to 29,000 lumens and a range of beam patterns to effectively light up large open areas such as grain stores.



Robust and Durable

Robust and durable construction from marine grade aluminium and with a wide operating temperature for even the most challenging conditions.



Retrofittable and Modular

Designed to directly replace traditional discharge light sources up to 400W SON. The modular design allows easy access to key components and the ability to mount the PSU remotely (contact Raytec for details).



Controllable

DALI 2.0 Dimmable as standard for precise and flexible control of lighting assets.

5 YEAR WARRANTY

All Raytec luminaires are provided with an industry leading 5 year warranty and have an expected useful life in excess of 10 years. See Warranty Statement for details.




Technical Specifications

Certification

| | |
|---|--|
| ATEX Rating | ATEX and IEC Ex rated for Gas and Dust |
| Hazardous Area Rating | Zone 1 (Gas), Zone 21(Dust) |
| Certificates | Zone 1/21 Version CML17ATEX1148 and IECEx CML 17.0074 Zone 21 Only Version CML 18ATEX3161 and IECEx CML 18.0087 |
| Gas | Gas Group IIB version II 2 G D Ex db eb mb IIB T4 Gb Gas Group IIB + H2 version II 2 G D Ex db eb mb IIB+H2 T4 Gb Ta = -50°C to + 50°C |
| Dust (Zone 1/21 version and Zone 21 only version) | Ex tb IIIC T104°C Db Ta=-50°C to +50°C |
| ABS Certificate # | ABS Certificate # 20-1990083-PDA |

Automatic Thermal Cutback Feature

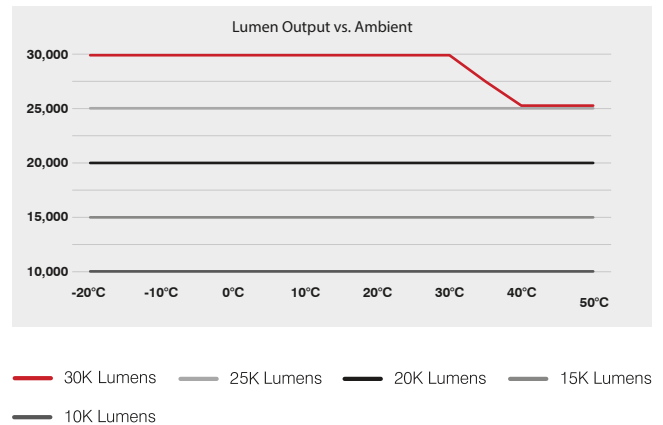

Electrical

| | 20K | 25K | 30K |
|---------------|---|------|------|
| Input | 150-264V 50/60Hz AC/DC 110V variant available - please contact Raytec | | |
| Power | 200W | 250W | 300W |
| Termination | Incoming terminal block suitable for looping 4 core 4mm ² cable (6mm ² available - POA) | | |
| Power Factor | >0.95 | | |
| Cable Entries | 2xM20 as standard (other entries available upon request), dispatched complete with one ATEX/IEC Ex approved blanking plug | | |


Optical

| | 20K | 25K | 30K |
|-----------------------------------|-------------------------------------|----------|----------|
| Beam Patterns | 30° x 30° or 60° x 60° or 90° x 90° | | |
| Lumen Output (Up to) | 19,423lm | 24,278lm | 29,134lm |
| LED Type | Platinum Elite SMT LEDs | | |
| Number of LEDs | 24 | | |
| CRI | 70+ | | |
| Colour Temperature | 5,700K | | |
| Automatic Thermal Cutback Feature | Refer to the graph above | | |


Mechanical

| | 20K | 25K | 30K |
|---------------------------|---|-----|-----|
| Burning Position | Universal | | |
| IP Rating | IP66 | | |
| Temperature Range | -50°C to +50°C | | |
| Weight | 23.5kg (51.8lbs) | | |
| Enclosure | Marine grade aluminium epoxy powder coated, toughened glass, all external fasteners and brackets are marine grade stainless steel | | |
| Unit Colour | Silver (RAL 9006) | | |
| Installation Instructions | Please see document 1050-D-00006 at www.raytecltd.com | | |
| Dimensions | 536 x 422 x 172mm (21.1 x 16.6 x 6.8") | | |
| Mounting | Ceiling mount bracket (see dimension drawings on page 3) | | |

Product Dimensions

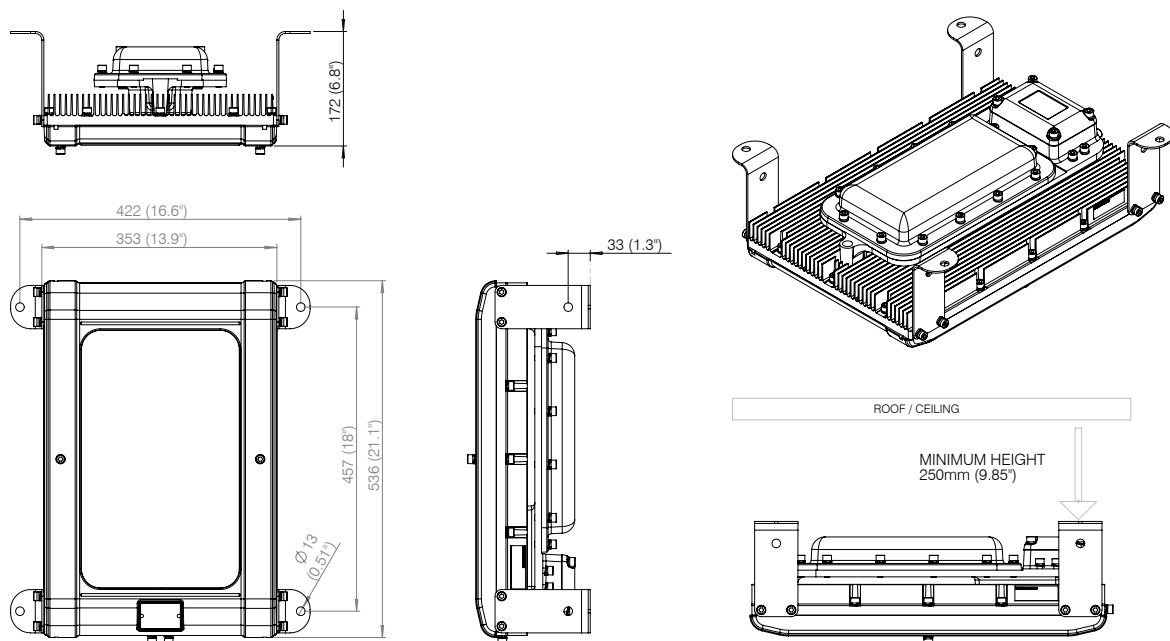

Beam patterns - Circular

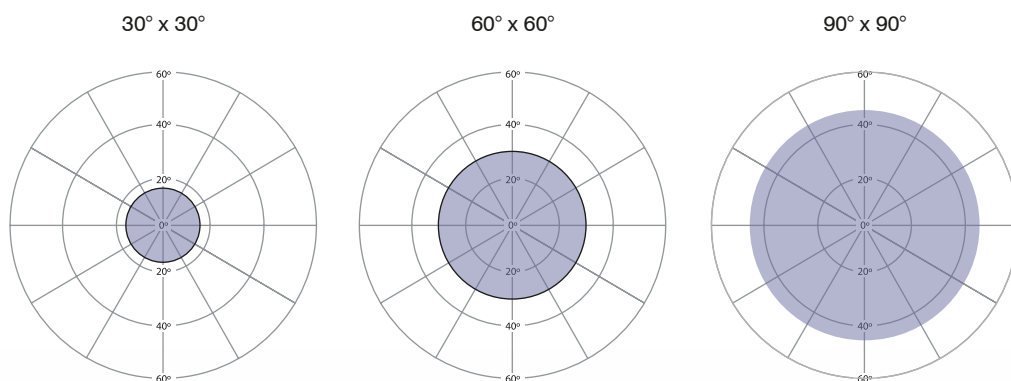

Part Code Builder

SPARTAN High Power Bay

Example - SPX-HPBY15K-W-9090

| Family | Model | Light Type | Optics | Variant | Power | Entry |
|----------------------------|---------|----------------|--------|---------------------------|------------------------|------------------|
| SPX | HPBY20K | W- White Light | 3030 | NOT STATED - Standard IIB | Not Stated - 150-264ac | Not Stated - M20 |
| SPZ (for Z21 version only) | HPBY25K | | 6060 | H2 - IIB+H2 | 110 - 110V-277Vac | M25 |
| | HPBY30K | | 9090 | Z21 - (SPZ Only) | | |