


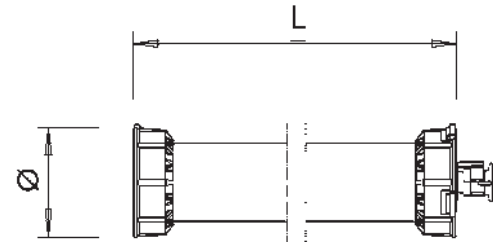
<b>ATEXOR code</b>	SH1LEDA12
<b>Manufacturing date</b>	Q4/2020
<b>Product description</b>	Explosion protected portable luminary
<b>ATEX &amp; IECEx marking</b>	 Ex II 2 G Ex eb mb op is IIC T4 Gb Ex II 2 D Ex tb op is IIIC T90°C Db
<b>Temperature classification</b>	T4 (internal) T70 °C (external)
<b>Operating temperature</b>	-20°C ... +40°C
<b>Light source</b>	1 LED module with SafeEye® technology
<b>Light emitted at source</b>	2350 lm
<b>Luminous flux (measured)</b>	1340 lm
<b>Colour temperature</b>	5000 K +/- 10 %
<b>Colour rendering index</b>	>80
<b>Photobiological safety</b>	Exempt group (No marking required, safe in normal use)
<b>Supply Voltage (min-max)</b>	9-15VAC/DC
<b>Supply Current (typical)</b>	12V~1,5 A
<b>Electrical class</b>	Class 3 (<50V)
<b>Input power (P)</b>	17 W
<b>Power factor</b>	>0,8
<b>Cable</b>	Standard cable H07RN-F
<b>Plug</b>	2P+E, 3P, 2P
<b>Enclosure</b>	Dissipative materials (PC & TPE)
<b>Ingress protection</b>	IP66 (A-version)
<b>Weight (without cable and plug)</b>	1,72 kg
<b>Accessories</b>	SLAM Click'n Fix magnetic fixing system Protective film
<b>Warranty</b>	You will find detailed warranty conditions from <a href="http://www.atexor.com/downloads/warranty">www.atexor.com/downloads/warranty</a>





Datasheet  
SLAM Hornet 1LED 12V

Product model	Dimensions / mm	
	L	Ø
SLAM® Hornet 1LED A (cable, No Socket)	580	115



[www.fsesafe.com](http://www.fsesafe.com) / [www.fse-exdigital.com](http://www.fse-exdigital.com)