


# **L 5000 Z1** | SPOT VERSION **L 5000 Z1 F** | FLOOD VERSION

High intensity rechargeable handlamp ATEX Z1/21  
 Certified for explosive atmospheres, light, handy and powerful. Swivelling head, digital display and a state-of-the-art optic with different light beams: Spot (for long range) or Flood (for short range). It adapts to the most demanding and adverse working conditions.

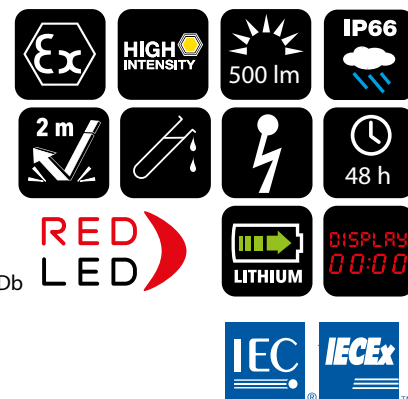

ATEX: II 2G Ex ia IIC T4 Gb  
 II 2D Ex ia IIIC T135°C Db  
 GAS ZONE 1 | 2  
 DUST ZONE 21 | 22

Ingress protection: IP66

Weight: 1300 g

Measures (LxWxH): 260 x 110 x 110 mm

Optic: 7 LEDs (1 x 3W high power / 2 x emergency light /  
 2 x signalling function- amber light / 2 x tail beacon-red light)

Burning time:

Main light: 3 different light settings 6/12/24 h

Auxiliary light: 3 different light settings 12/24/48 h

Torch body material: Thermoplastic resin with high resistance to the impacts, extreme temperatures and corrosive substances

Swivelling head: -30° / 0° / 30° / 60° / 90°

Lighting source: 70.000 cd (Spot) / 20.000 cd (Flood) / 500 lm

Switches: Two button switches of soft touch material ergonomic and oversized to guarantee easy pushing

Main: On/Off and light setting. Tail light On

Auxiliary: Emergency light mode or Signalling function


Battery: Li-ion | Voltage: 3,7 V | 10.000 mAh

Accessories: Shoulder strap (included), Magnet (included), Tripod (optional)



Charger: DC: 12 V / 24 V | AC: 100/240 V 50/60 Hz



## SPOT VERSION

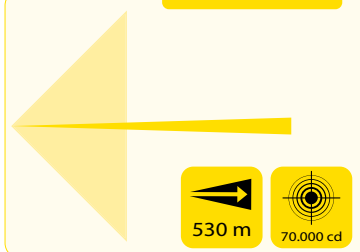

## FLOOD VERSION

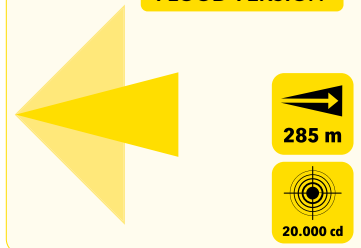

[www.fsesafe.com](http://www.fsesafe.com) / [www.fse-exdigital.com](http://www.fse-exdigital.com)