



SafetyCast™ 300 Virtual Sign Projector Datasheet

Overview:

The SafetyCast™ 300 Virtual Walkway Projector are the ideal way to display bright floor and wall safety signs in locations where there is high traffic, potential for a hazard, or uneven floors. The SafetyCast™ 300 Virtual Walkway Projector uses an image lens and a high-output LED bulb to project a clear sign at distances of up to 70 m (230'). The SafetyCast™ 300 Virtual Walkway Projector works well in almost all lighting conditions and is easy to mount and adjust. Once installed, there's virtually no maintenance, and you won't need to worry about replacing damaged signs on your floors or walls.

Key Features:

- Customizable – A large variety of safety signages and custom signs.
- Cost Effective - Minimal maintenance eliminates the need for repainting or retaping
- Ultra Visible - Powerful close-range and long-range projection, high-contrast image projection
- Smart Triggered - Optional capability to trigger signage using motion sensors, beam break sensors or push button
- Adjustable Focus

Specifications:

Lamp Details

Type of Light Source:	High Performance LED
Rated Power:	300 W
Light Source Life (MTTF):	30,000 hours at 25°C/77°F

Optical

Light Colour Temperature:	6,000 K
Luminous Flux:	30,000 lm
Projection Distance:	Up to 230 ft (70 m) in dark ambient lighting

Photometric data:



For details regarding Photometric Data, Projection dimensions, and Visibility Information, please use our **Interactive Equipment Estimator** at our website, safety.laserglow.com

Temperature Range (°C):	5°C to 35°C (41 to 95 °F)
Storage Temperature Range:	-10 to 50°C (15 to 120 °F)
Relative humidity:	5% to 80% noncondensing
Projector Power:	300W
Power Supply:	100-240 VAC nominal, 50/60 Hz, 2.5A, 300W
IP Rating:	IP65


Standard Warranty:	12 months
---------------------------	-----------

Smart Triggered Projection:	Projection flashing using either Motion Sensors or Break of Beam sensors
------------------------------------	--

Accessories included:	Mounting Bracket, Power supply
------------------------------	--------------------------------

SafetyCast™ 300 Virtual Sign Projector

Projector and Power Supply Dimensions:

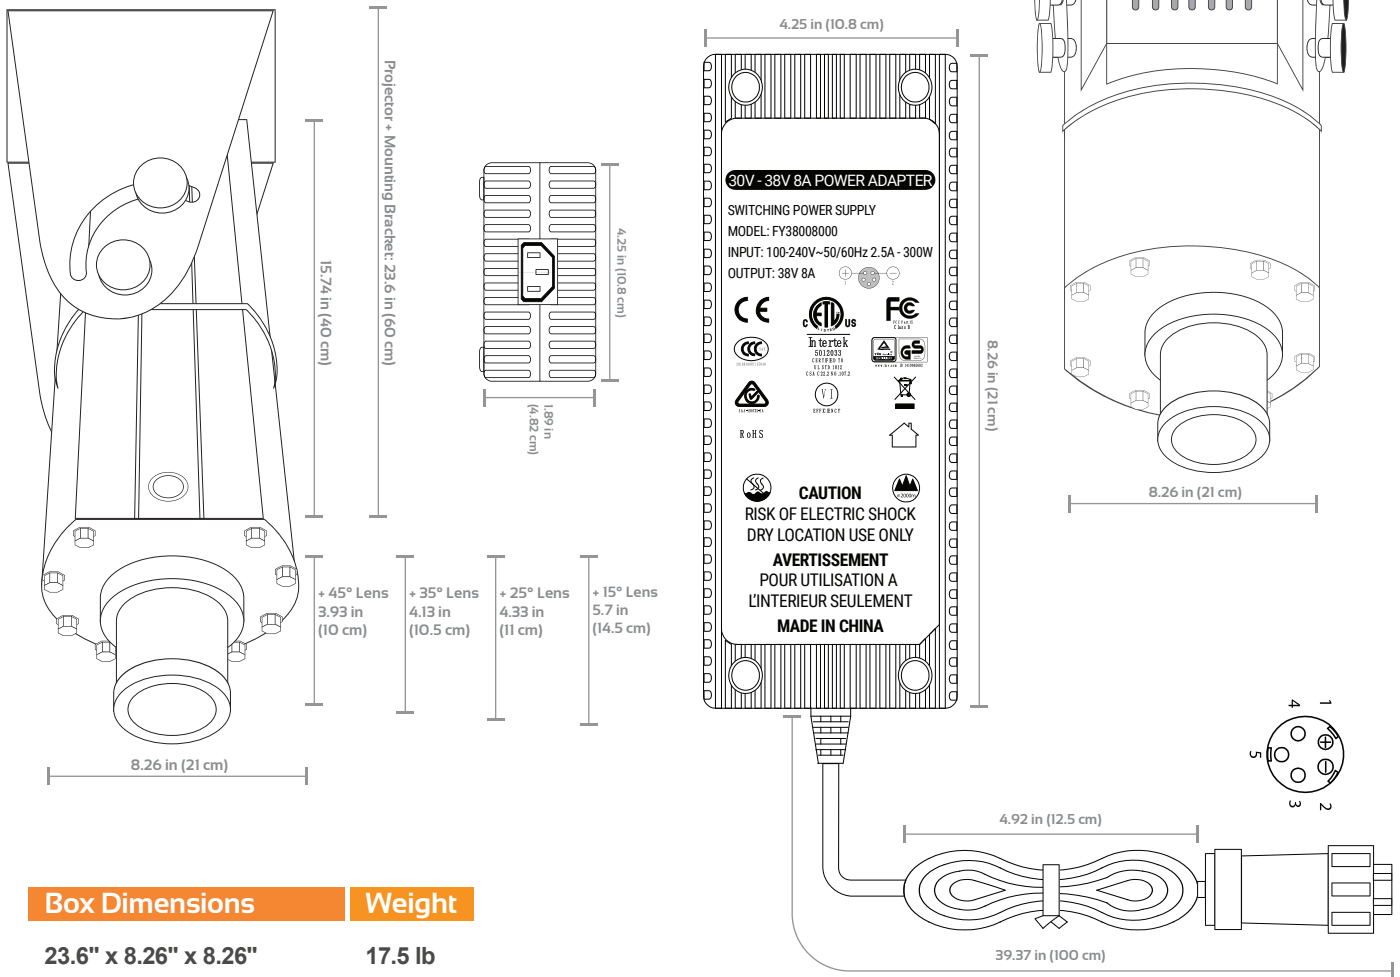

Box Dimensions

23.6" x 8.26" x 8.26"
(60cm x 21cm x 21cm)

Weight

17.5 lb
(8 Kg)

Accessories:

The most popular accessories for this model are shown here.

For additional details regarding these or other accessories please see our website or contact us directly.

Product SKU	Description
ABM088CXX	• No Drill Magnetic Mounts
AOO30015T	• Focusing Lens (F = Narrow Angle) 300 W
AOO30025T	• Focusing Lens (H = Medium Angle) 300 W

Product SKU	Description
AOG__XXX	• Image Template
AOGCUS8XX	• Custom Image Template

To check the Sign Template list and their availability, visit safety.laserglow.com



#05-34, Ubi Techpark (Lobby B), 10 Ubi Crescent, Singapore 408564
Tel. +65 6814 9717 +65 6025 3019
sales@fseprojects.com
www.fsesafe.com / www.fse-exdigital.com

E&OE: Data included in this sheet may be subject to change without notice. Please confirm critical specifications with our staff prior to ordering.