

VirtuaLine[™] SWITCH Line Projector Datasheet



Overview:

Laserglow's VirtuaLine™ series of line projecting LED light fixtures are a innovative and cost effective way to demarcate walkways and laneways without using paint or tape. VirtuaLine™ SWITCH Line Projector fixtures create an indestructible floor line that eliminates the need for maintenance required by floor tape and paint lines, changing the way you handle floor marking in your facility.

Key Features:

- Modular Easily reconfigure spaces within your facility without stripping paint or tape
- · Highly Durable No wear and tear from foot traffic
- · Cost Effective Eliminates the need for repainting or retaping
- · Ultra Visible Overcomes complacency by attracting more attention because of a dynamic projection
- · Smart Triggered Optional capability to trigger signage using motion sensors, beam break sensors or push button
- · Adjustable Focus Control the thickness of the line projections

Specifications:

Lamp Details

Type of Light Source: High Performance LED

Rated Power: 80 W

Light Source Life (MTTF): 30,000 hours at 25°C/77°F

Optical

Light Colour: Amber, Red, Green, Blue, White (6000K)

Luminous Flux: 12,000 lm

Projection Distance: Up to 51 ft (17 m)

Photometric data:



For details regarding Photometric Data, Projection dimensions, and Visibility Information, please use our Interactive Equipment Estimator at our website,

safety.laserglow.com

Temperature Range (°C): -20 to 50 °C (-4 to 120 °F) **Relative humidity:** 5% to 80% noncondensing

Projector Power: 80W

Power Supply: 100-240 VAC nominal, 50/60 Hz, 0.67A, 80W

IP Rating: IP65


Standard Warranty: 12 months

Smart Triggered Projection: Projection flashing using smart controller and sensors


Accessories included: Mounting bracket and power supply

VirtuaLine[™] SWITCH Line Projector

Projector and Power Supply Dimensions:

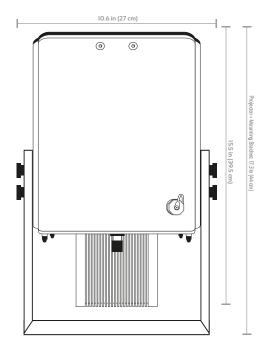

Box Dimensions	Weight
20" x 14" x 14"	16 lb
(50cm x 36cm x36cm)	(7.3 Kg)

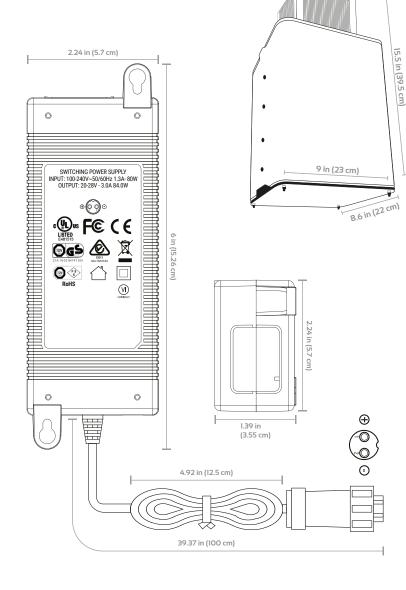

Accessories:

The most popular accessories for this model are shown here.

For additional details regarding these or other accessories please see our website or contact us directly.

Product	SKU	D	escription
Lenses			
9	ABM088CXX	•	No Drill Magnetic Mounts
	AVLLLKXXX	•	Line Length Limiting Panels



#05-34, Ubi Techpark (Lobby B), 10 Ubi Crescent, Singapore 408564
Tel. +65 6814 9717 +65 6025 3019
sales@fseprojects.com
www.fsesafe.com / www.fse-exdigital.com

E&OE: Data included in this sheet may be subject to change without notice. Please confirm critical specifications with our staff prior to ordering.